




safely stored and retrieved with hook near fire hydrant



broken arrows slot in to metal braces at rear



laces secure the foam

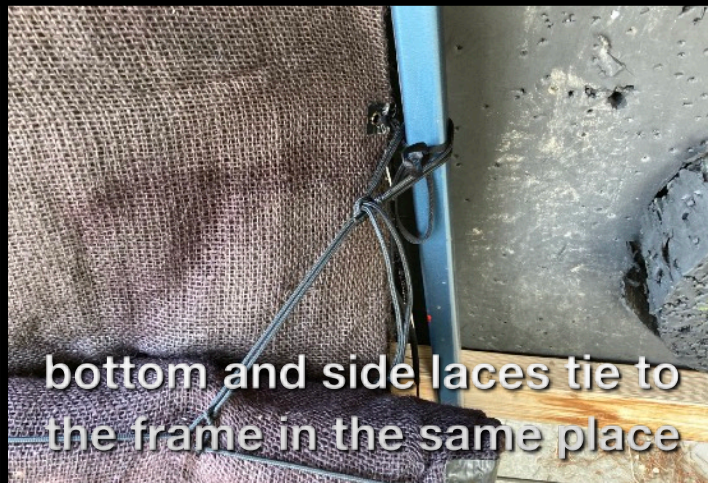


bottom and side laces tie to the frame in the same place



23/64" diameter woods from a 56lb recurve



two (1.2m x 40cm) layers of foam(Bunnings)can be slotted in to the two sleeves on each side

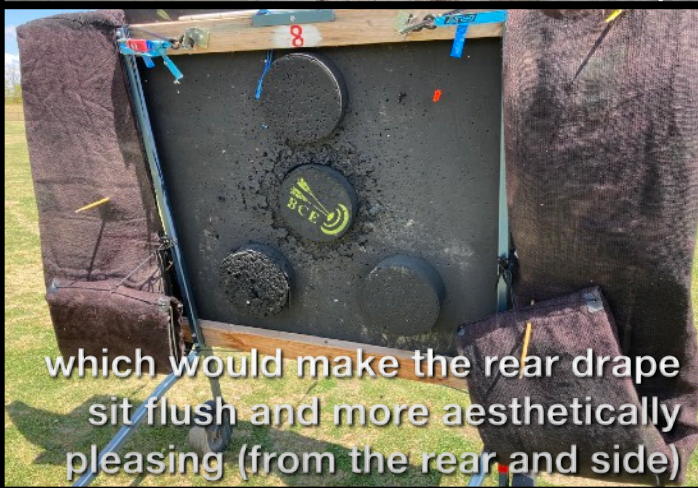

which would make the rear drape sit flush and more aesthetically pleasing (from the rear and side)



30m

for intermediate or experienced bare-bow shooters this saves time searching for wayward arrows especially at 50-60m+